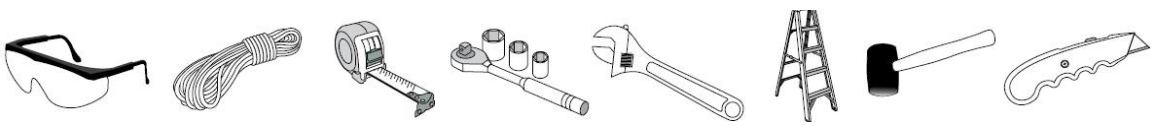
SHELTER ASSEMBLY MANUAL Model#203012 W6.1xL9.15xH3.66m



RECOMMENDED TOOLS



Please read instructions COMPLETELY before assembly. This shelter MUST be securely anchored.

THIS IS A TEMPORARY STRUCTURE AND NOT RECOMMENDED AS A PERMANENT STRUCTURE.

YOU MUST READ THIS DOCUMENT BEFORE YOU BEGIN TO ASSEMBLE THE SHELTER.

Thank you for purchasing our shelter. When properly assembled and maintained, this product will provide years of reliable service. These instructions include helpful hints and important information needed to safely assemble and properly maintain the shelter. Please read these instructions ***before*** you begin.
If you have any questions during the assembly, please contact local dealer for assistance.

SAFETY PRECAUTIONS

. Wear eye protection.
. Wear head protection
. Wear gloves when handling metal tubes
. Use a portable GFCI (Ground Fault Circuit Interrupter) when working with power tools and cords.
. Do not climb on the shelter or framing during or after construction.
. Do not occupy the shelter during high winds, tornadoes, or hurricanes.
. Provide adequate ventilation if the structure is enclosed.
. Do not store hazardous materials in the shelter.
. Provide proper ingress and egress to prevent entrapment.

ANCHORING INSTRUCTIONS

Prior to assembling this shelter, please read the ***MUST READ*** document included with the shipment.
⚠**WARNING:** The anchor assembly is an integral part of the shelter construction. Improper anchoring may cause shelter instability and failure of the structure. Failing to anchor the shelter properly ***will void the manufacturer's warranty*** and may cause serious injury and damage.









LOCATION

Choosing the proper location is an important step before you begin to assemble the structure.
The following suggestions and precautions will help you determine whether your selected location is the best location.
. Never erect the structure under power lines.
. Identify whether underground cables and pipes are present ***before*** preparing the site or anchoring the structure.
. Location should be away from structures that could cause snow to drift on or around the building
. Do not position the shelter where large loads such as snow and ice, large tree branches, or other overhead obstacles could fall.
. Your shelter's cover can be quickly removed and stored prior to severe weather conditions. If strong winds or severe weather is forecast in your area, we recommend removal of cover.

SITE

After choosing a location, proper preparation of the site is essential. The following site characteristics will help ensure the integrity of the structure.
. The support structure must be level to properly and safely erect and anchor the frame.
. Drainage: Water draining off the structure and from areas surrounding the site should drain away from the site to prevent damage to the site, the structure, and contents of the structure.
⚠**WARNING:** The individuals assembling this structure are responsible for designing and furnishing all temporary bracing, shoring and support needed during the assembly process. For safety reasons, those who are not familiar with recognized construction methods and techniques ***must seek the help of a qualified contractor.***

Storage Shelter 203012(6.1x9.15x3.66m) Parts List

Part Code	Description		Qty/ pcs
1	Roof Bent Joist		6
2	Middle Bent Joist		12
3	Lower Bent Joist		12
4	Purlin		25
5	Lower Tensioning Tube for Roof Cover		8pcs long 2pcs short
6	Support Tube		2pcs long 2pcs short
6A	Roof Bracing Tube		6
7	Base Plate for Four Corners		4
8	Base Plate for Interior Arch		8
9	Tube Clip for No.6		4
10	Stake Peg		36
11	Roof Cover		1
12	Front & Back Cover		2
13	Bolt M10x60 for swaged tube		72
13A	Bolt M8x50 for Part No.6		4
14	Carriage Bolt M10x90 for Purlin connection		30
15	Bolt M10x30 for Part No.6A		12
16	Zig-Zag Rope for Tensioning Roof Cover and Front&Back Cover		1 bag
17	Belt for Tie Down Ratchet		12
18	Plastic Cap for Part No.5		4
19	Anti-wear Pad		28

1.Base Plate Foundation

1. Please refer to the diagram (Figure 1) to mark the position of base plates.

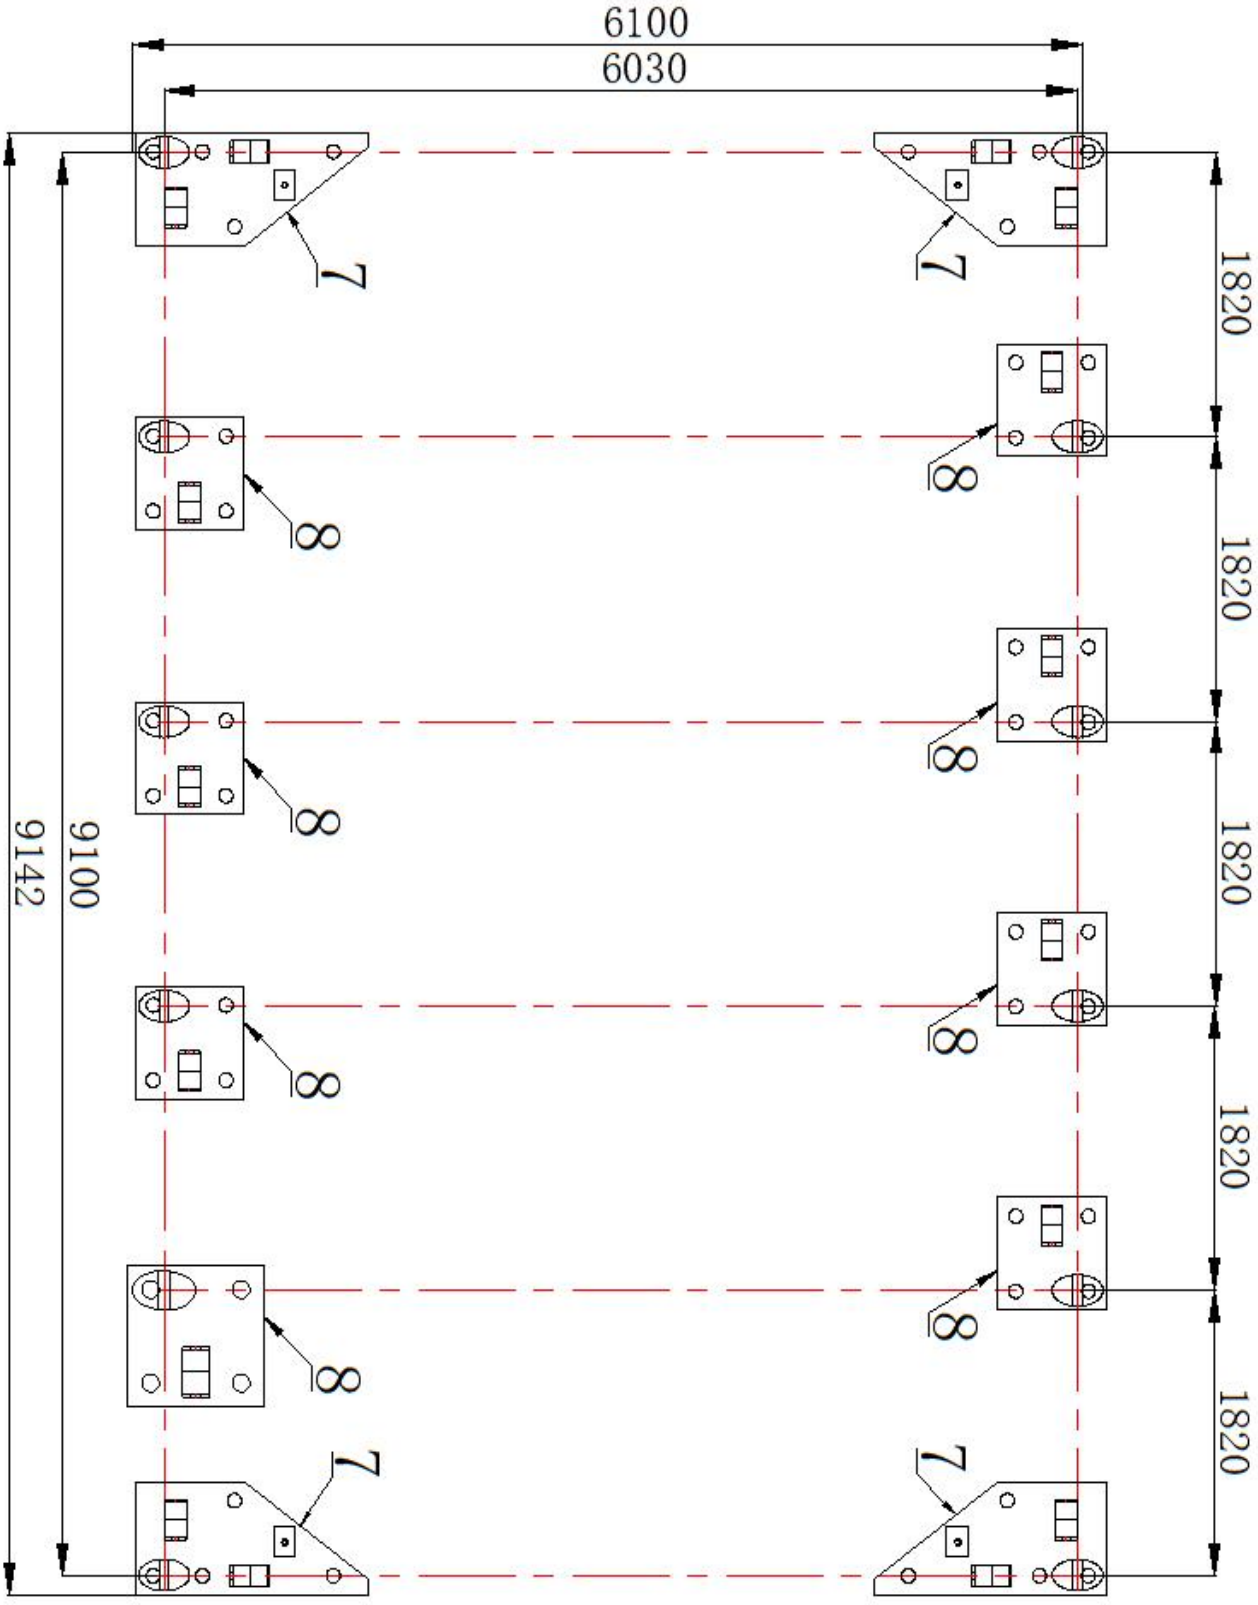


Figure.1

2. Arch and Roof Bracing Tube Installation

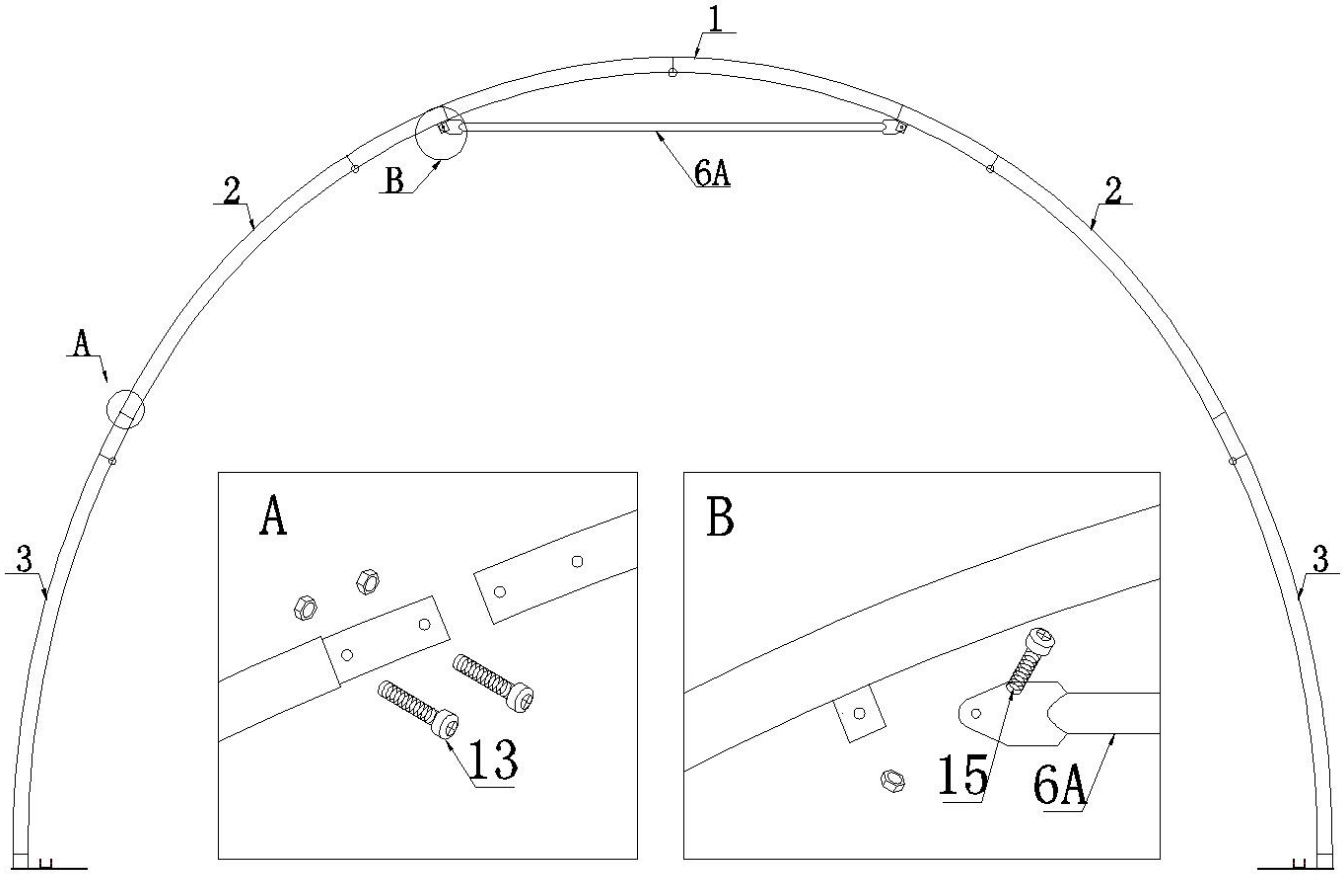


Figure.2

3. Purlin and Support Tube Installation

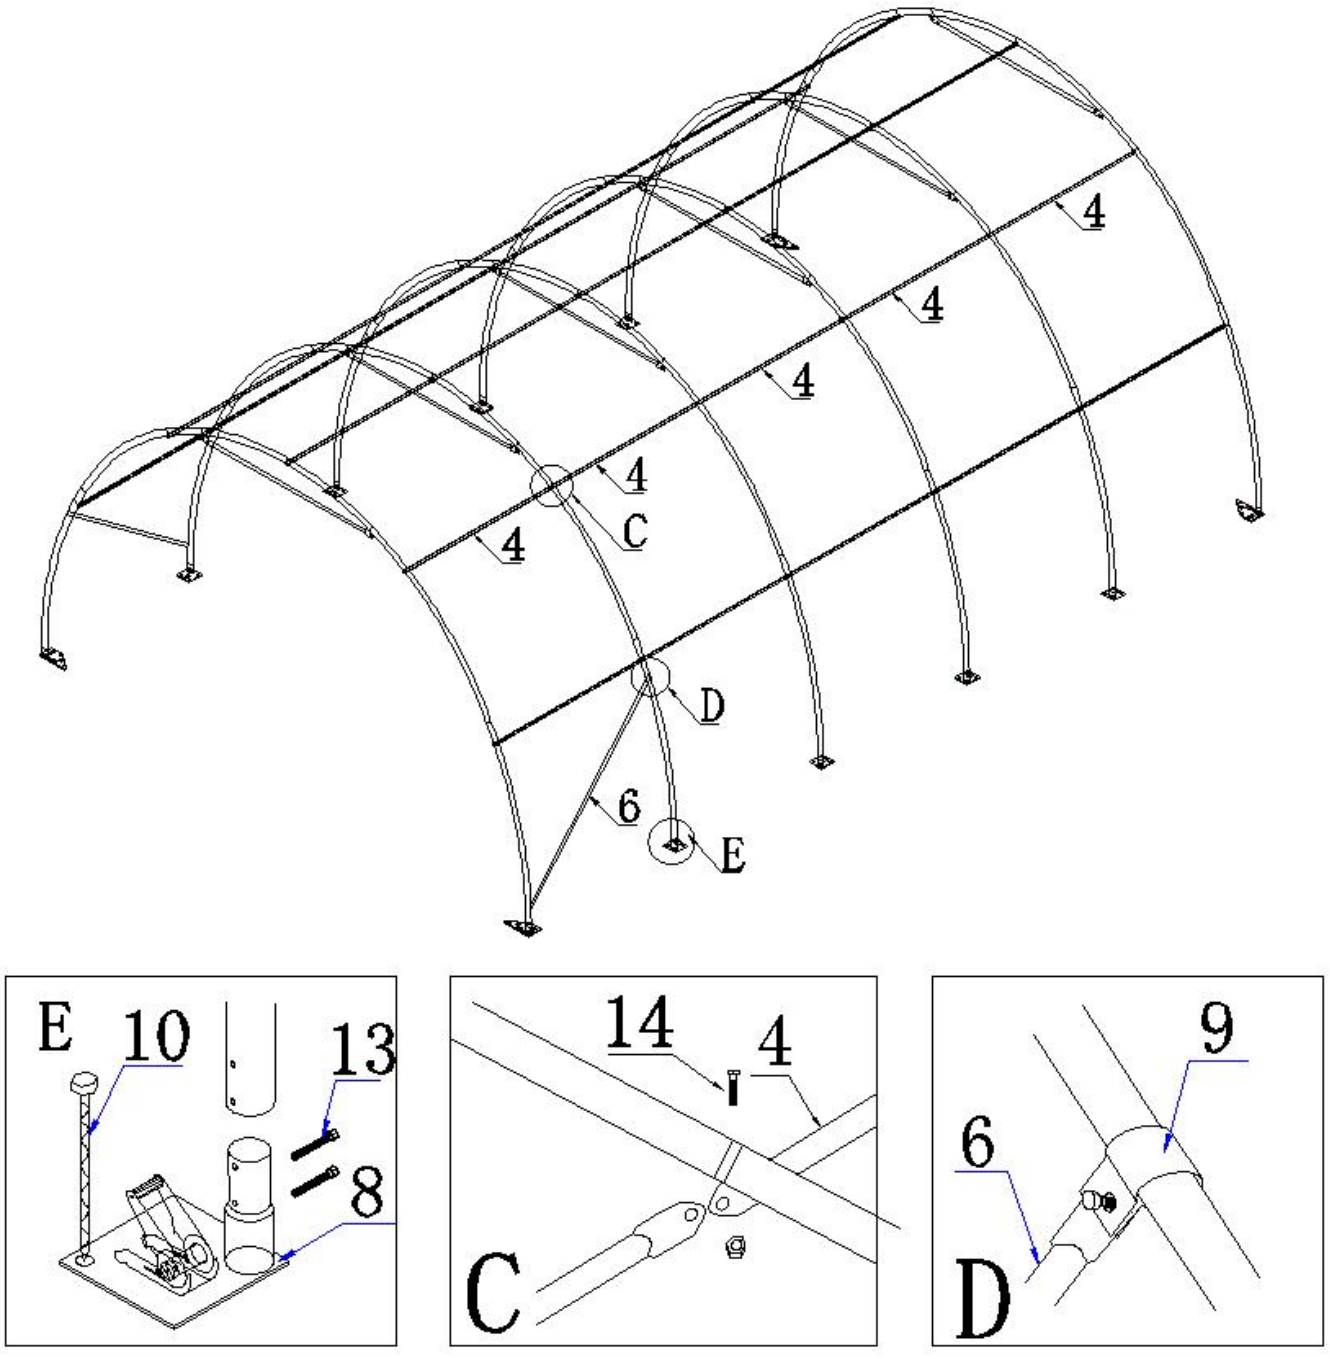


Figure.3

4. Front & Back Cover Installation

Assemble Front&Back Cover by Zig-zag Rope (No.16) between tarp grommet and Front&Back panel arch.

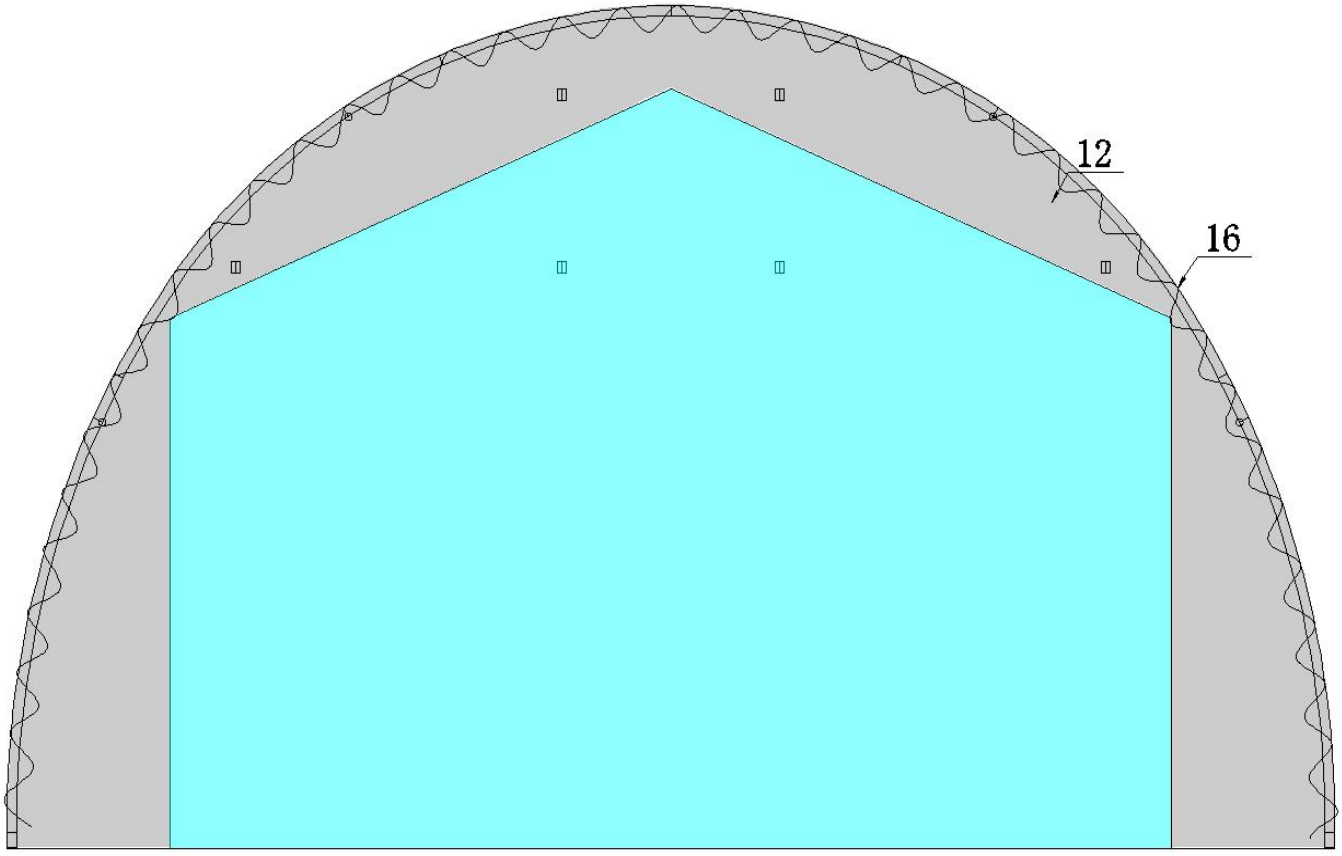


Figure.4

5. Roof Cover Installation

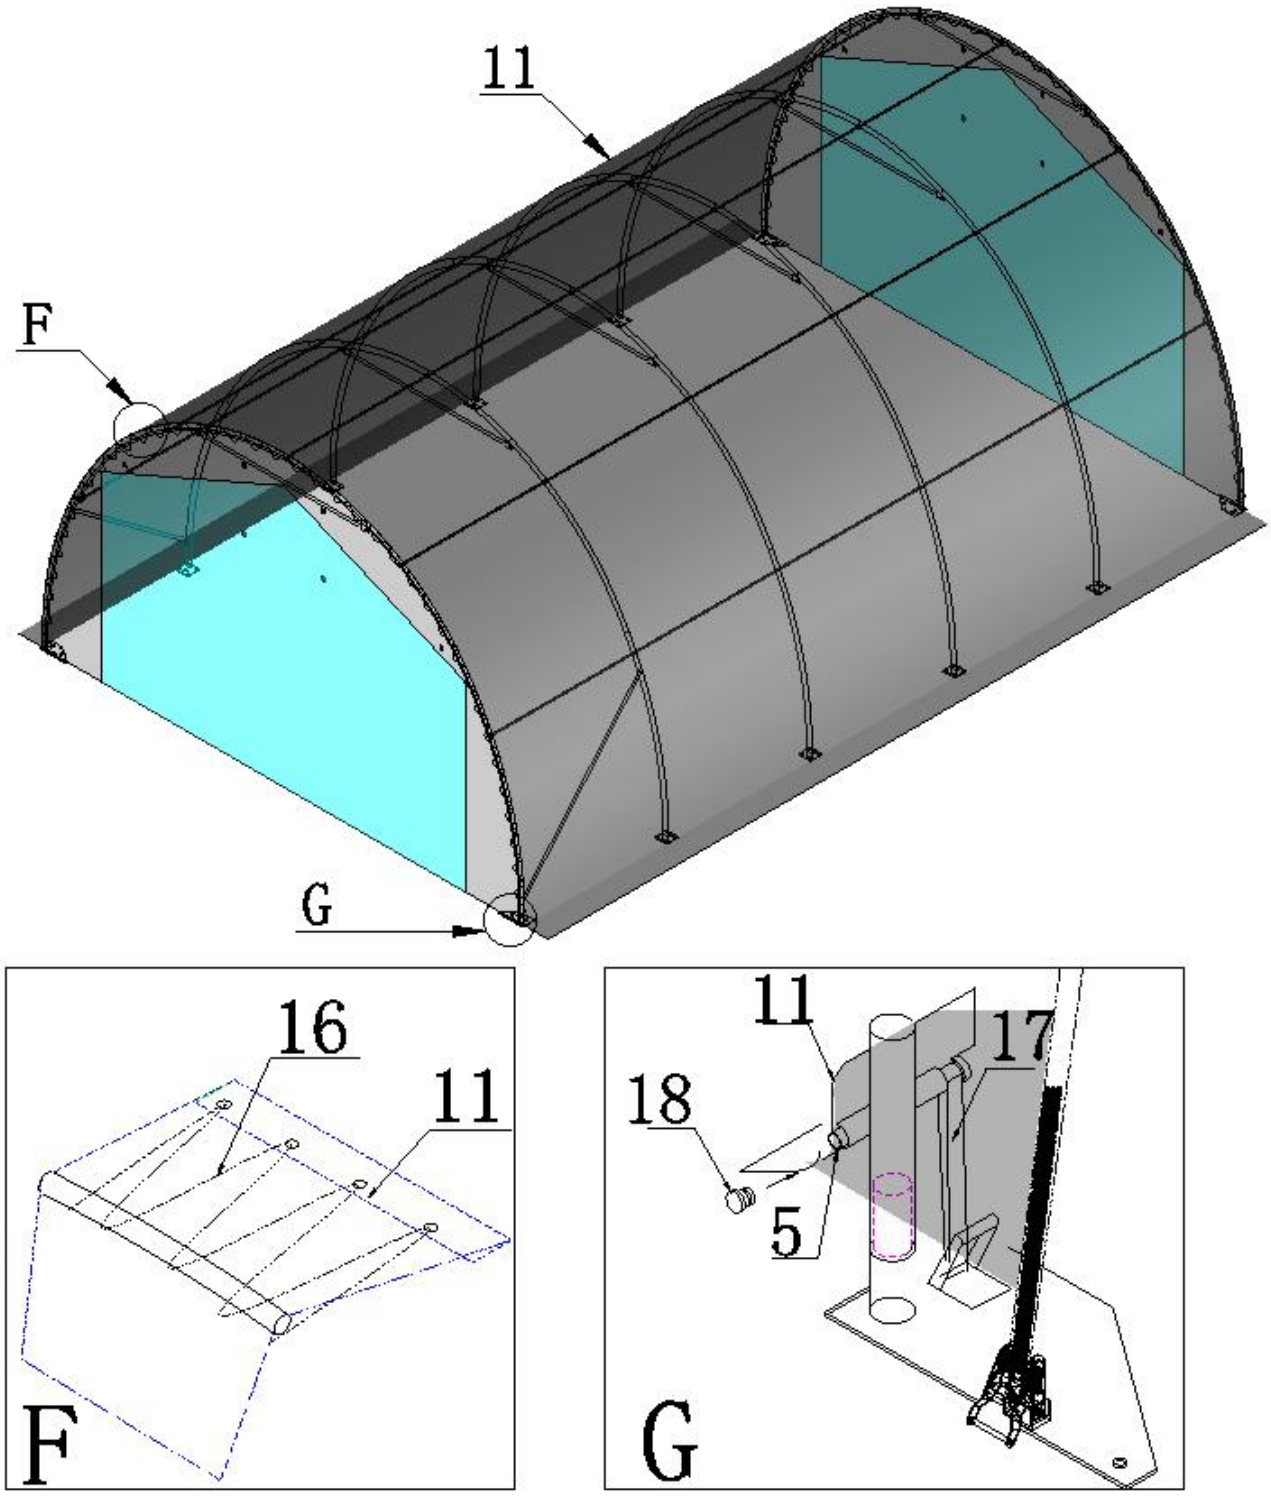


Figure.5

Now your assembly is completed.