

Fasadenor.no


VARENØ: HTVE-501-9080


VARENØ: HTVE-501-8090

VARENØ: HTVE-501-8080



VARENØ: HTVE-501-9090

Brukerveiledning

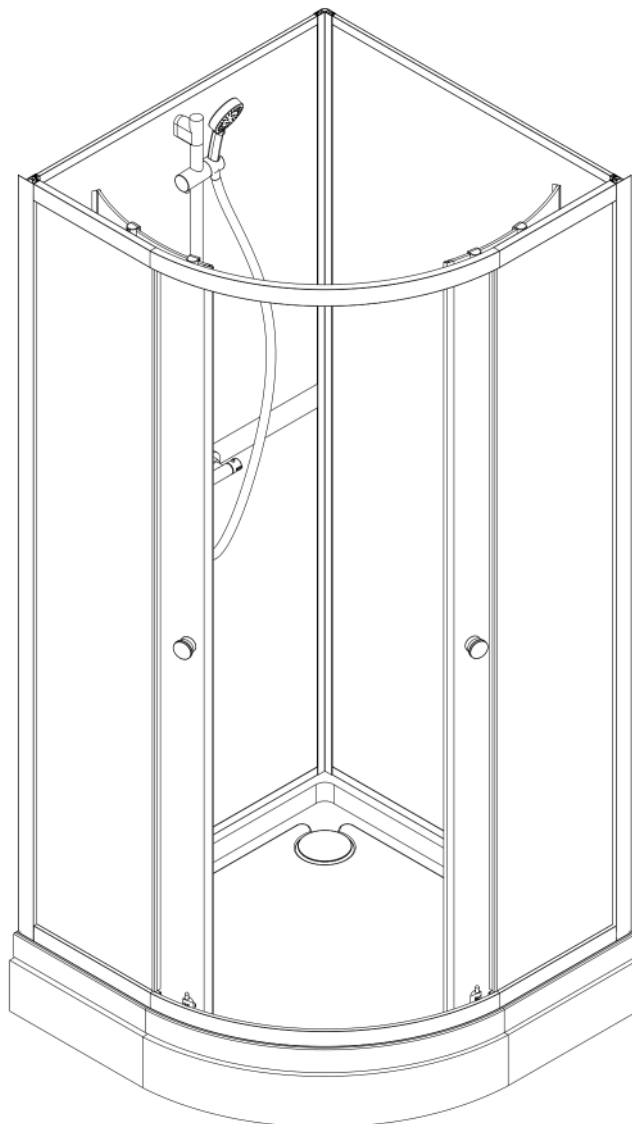



PH2
PZ2



troubleshooting

Problem	Action
Leakage	Check the watertightness between the base and the glass walls
	Check the watertightness between the base and the rails
	Check the watertightness between the rails and the glass walls
Walls do not fit properly to the base	Check with a spirit level that the base is horizontal
	Check with a spirit level that the walls are vertical
Doors make a noise and/or do not open and close smoothly	Check with a spirit level that the shower cabinet is fastened vertically to the wall
	Check door wheels and their lubrication

Maintenance

Cleaning

- Clean regularly with a mixture of equal parts of water and vinegar. Allow 5 minutes for it to act, and then rinse with water.
- Do not use strong or abrasive detergents or solvents, this could damage the product
 - Follow the manufacturer's instructions when using detergents. Do not use steel wool/Scotchbrite, abrasive detergents or sharp implements.
- Use bactericidal detergent on a regular basis.
- Leave the doors open after using the shower to reduce the risk of mildew.
- Rinse off residual soap etc. from the walls after use.

Maintenance

- Lubricate the doors if they make a noise, or do not open and close smoothly.
- Check that all parts are correctly fitted and sealed before using the shower.
- Check that the walls are vertical and correctly fitted to each other before use.

Fellsøking

Problem	Tiltak
Lekkasje	Kontroller vanntettheten mellom bunnen og glassvegger
	Kontroller vanntettheten mellom bunnen og skinner
	Kontroller vanntettheten mellom skinner og glassvegger
Vegger ikke rettet inn mot bunnen	Kontroller med vaterpass at bunnen er horisontal
	Kontroller med vaterpass at veggene er vertikale
Dørene støyer og/eller beveger seg ujevnt	Kontroller med vaterpass at dusjkabinettet er vertikalt festet mot veggen
	Kontroller hjulene på dørene og om de er smurt


vedLikeHoLd


rengjørIng


- Rengjør regelmessig med en blanding av like deler vann og eddik. La virke i 5 minutter og skyll med vann
- Ikke bruk sterke eller slipende rengjøringsmidler eller løsemidler, det kan skade produktet
 - Følg produsentens anvisninger ved bruk av rengjøringsmiddel. Ikke bruk stålull/scotchbrite, slipende rengjøringsmidler eller skarpe gjenstander
- Bruk regelmessig bakteriedrepende rengjøringsmiddel
- La dørene stå åpne etter at dusjen er brukt, for å redusere faren for at det dannes mugg
- Skyll bort såperester og lignende fra veggene etter hver gangs bruk


vedLikeHoLd



- Smør hvis dørene støyer og/eller beveger seg ujevnt
- Kontroller at alle deler er riktig montert og tettet før du bruker vann
- Kontroller før bruk at veggene er vertikale og korrekt tilpasset mot hverandre

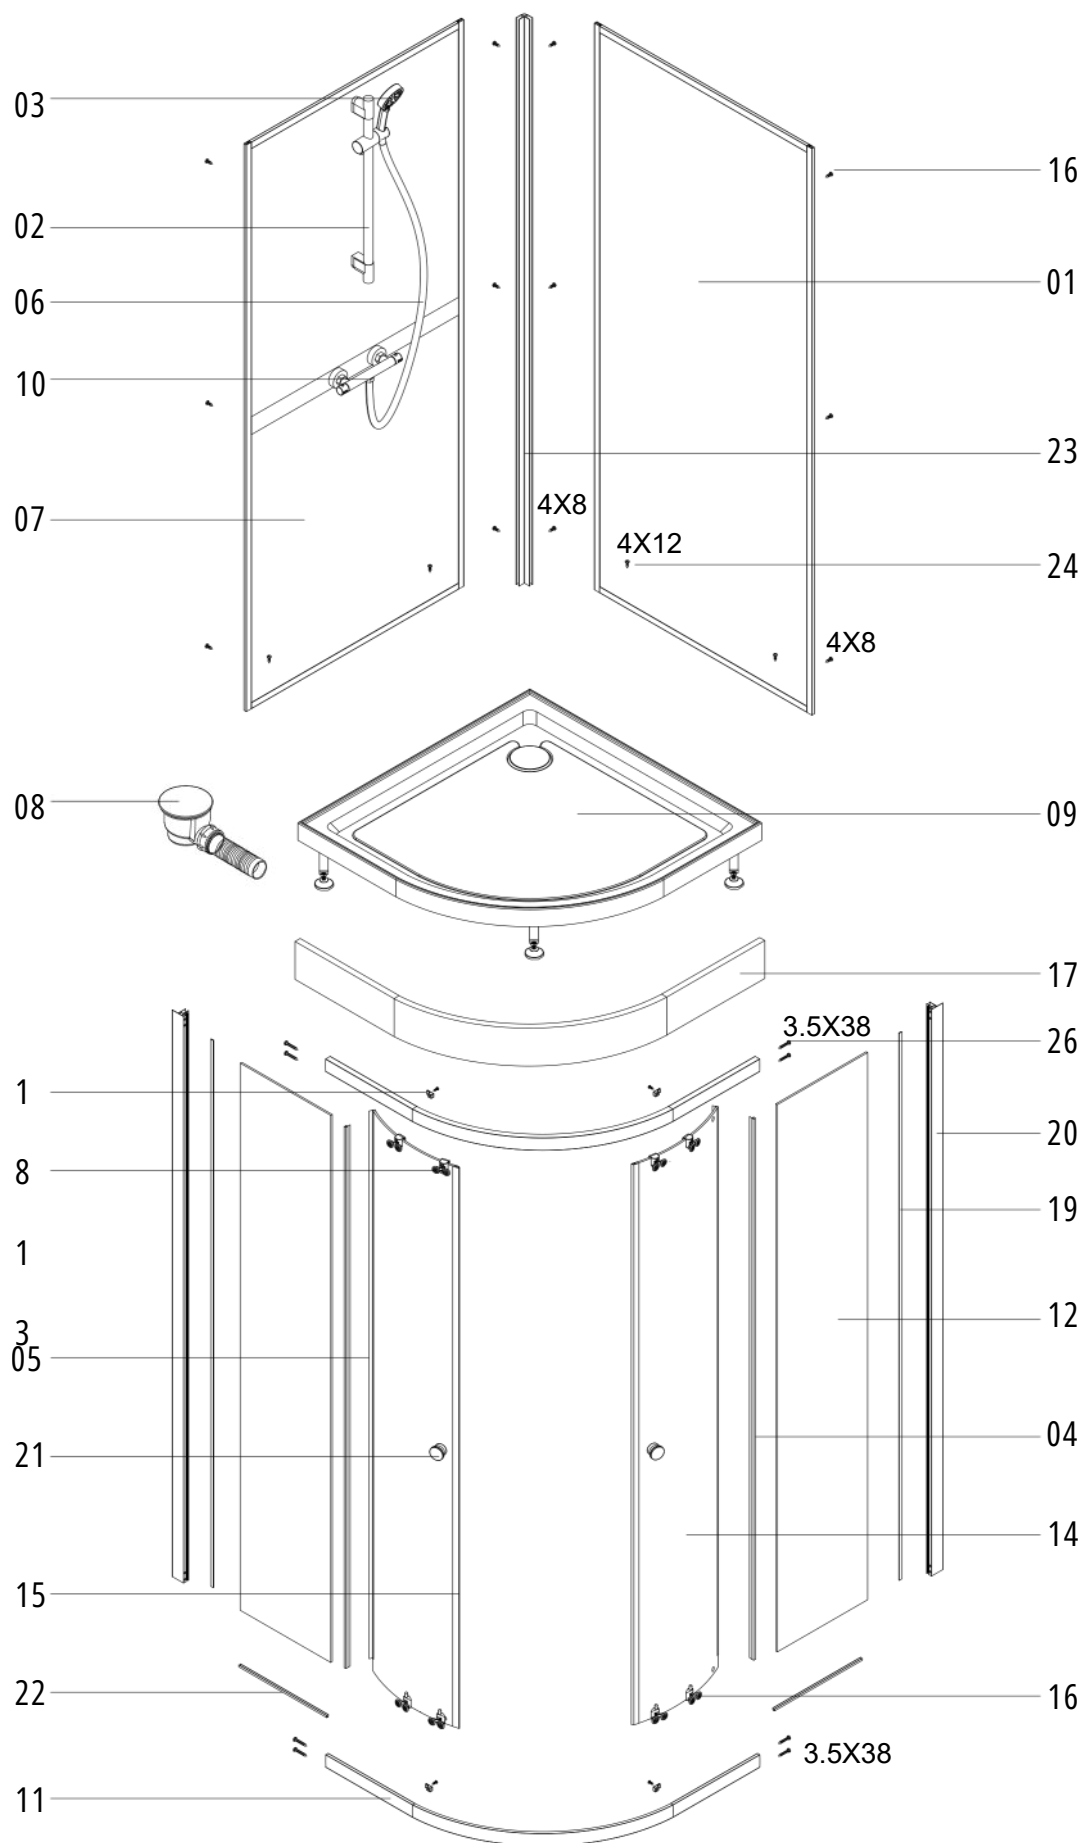


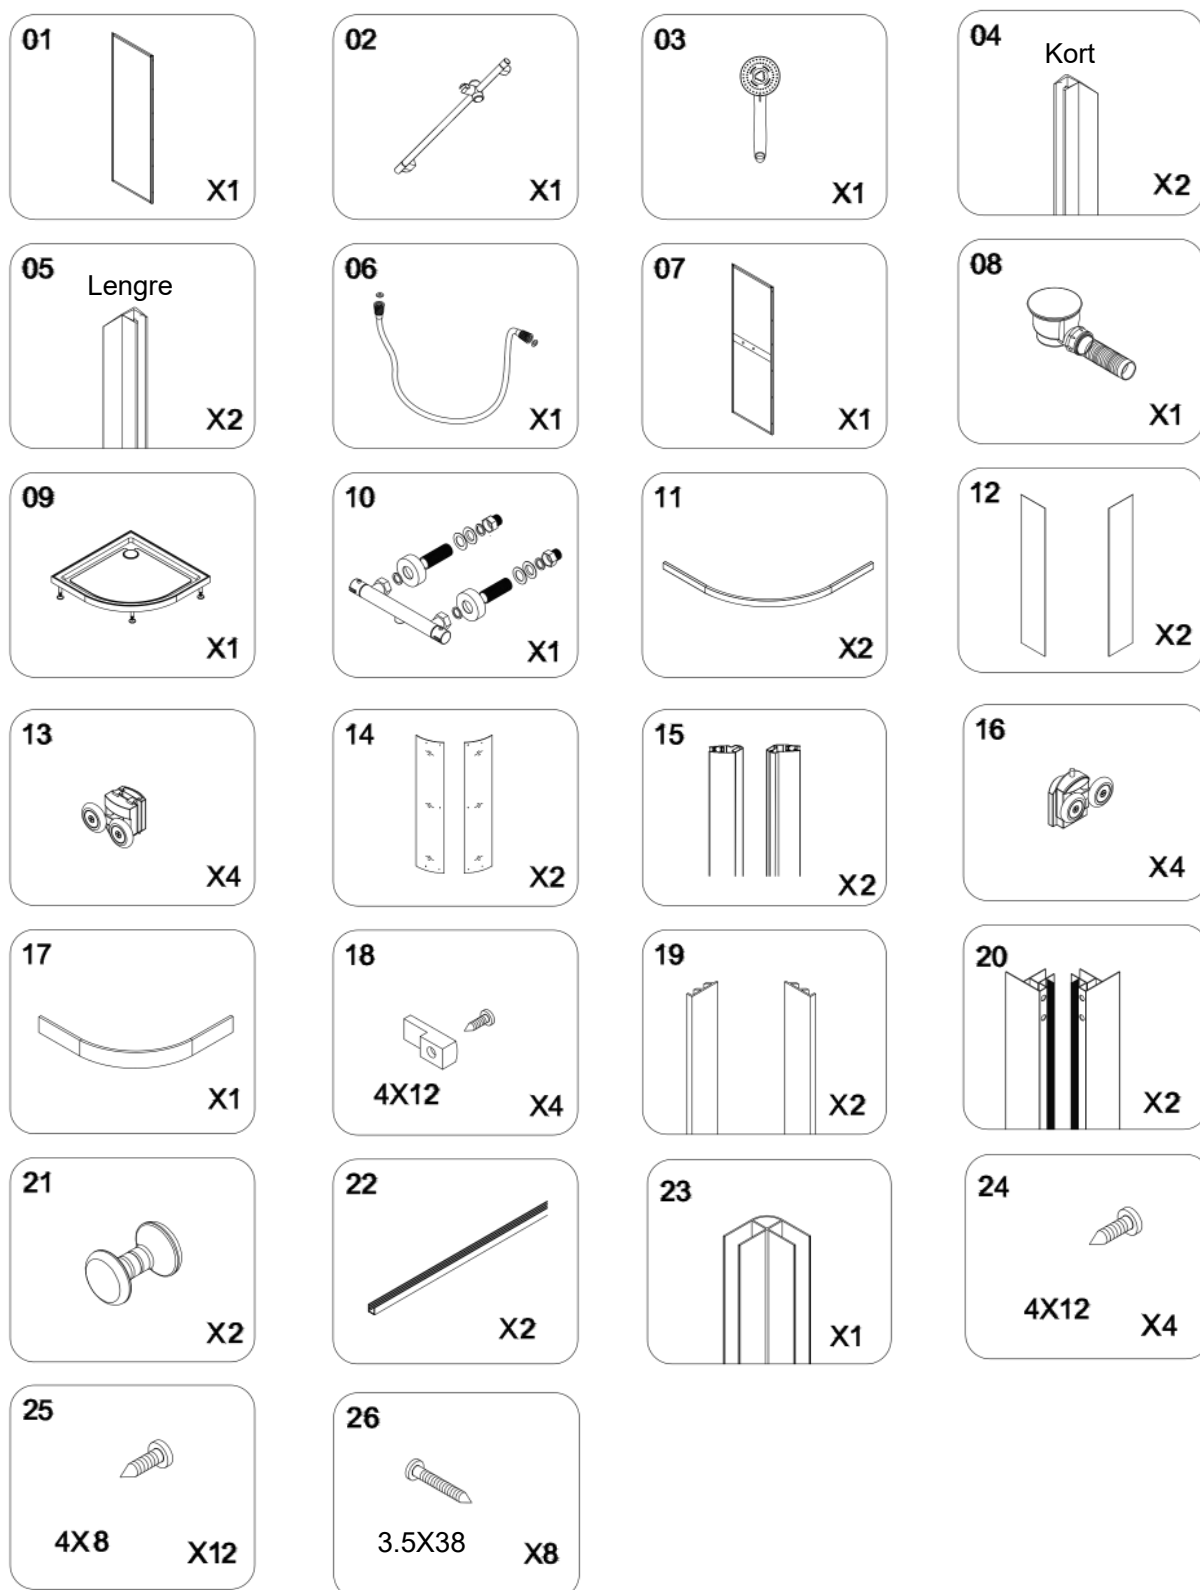

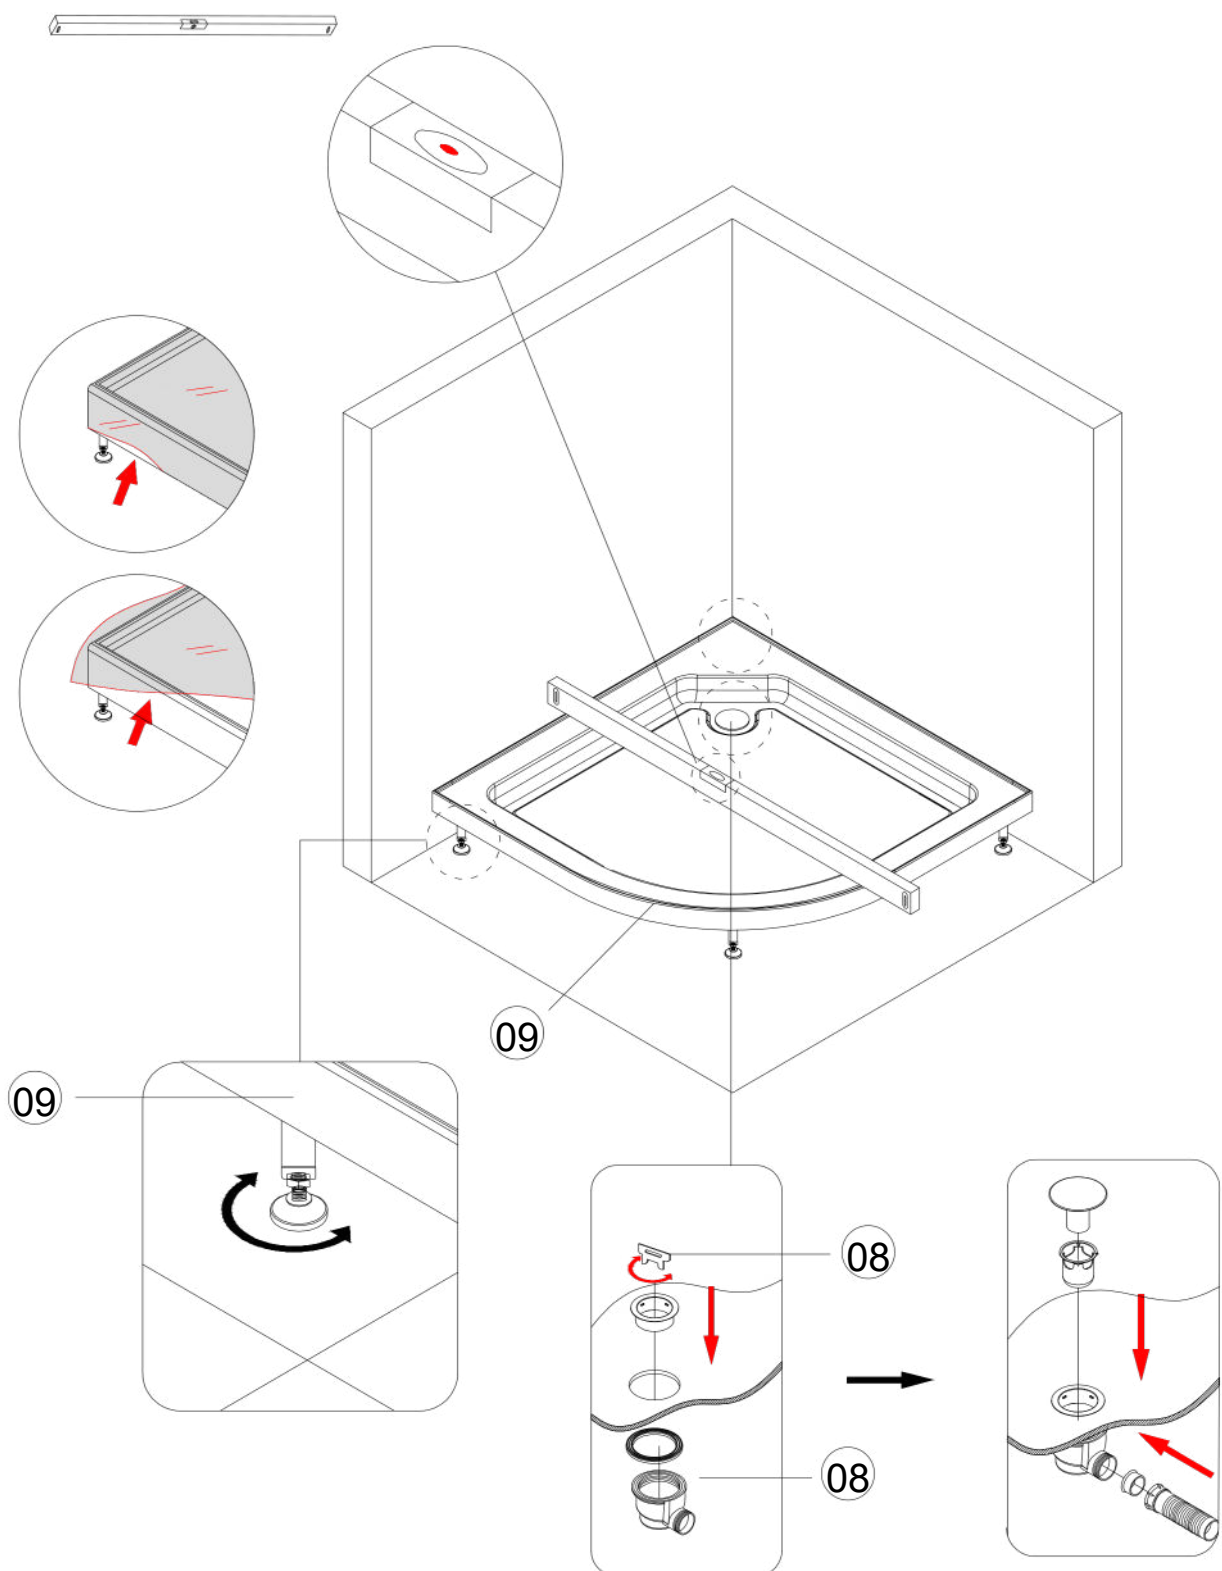

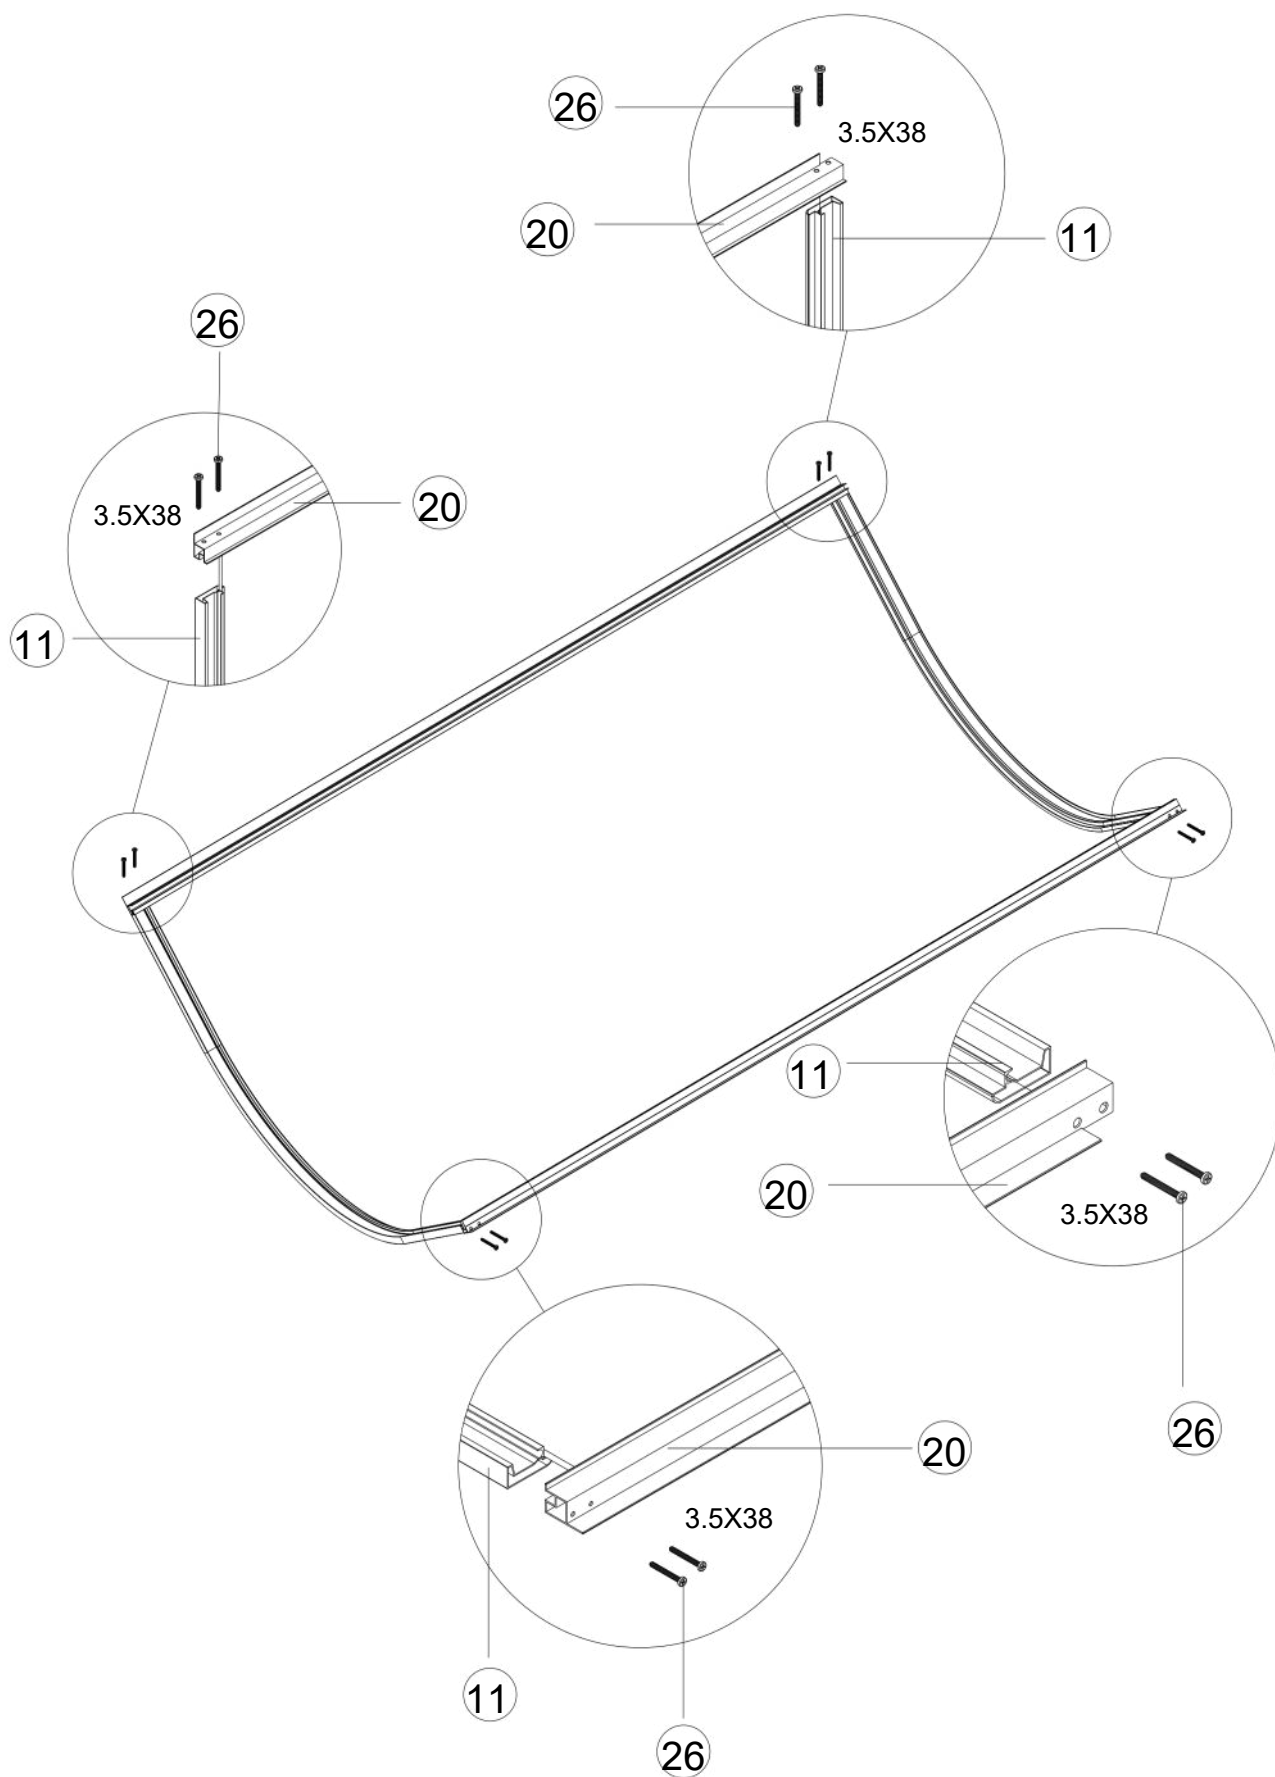

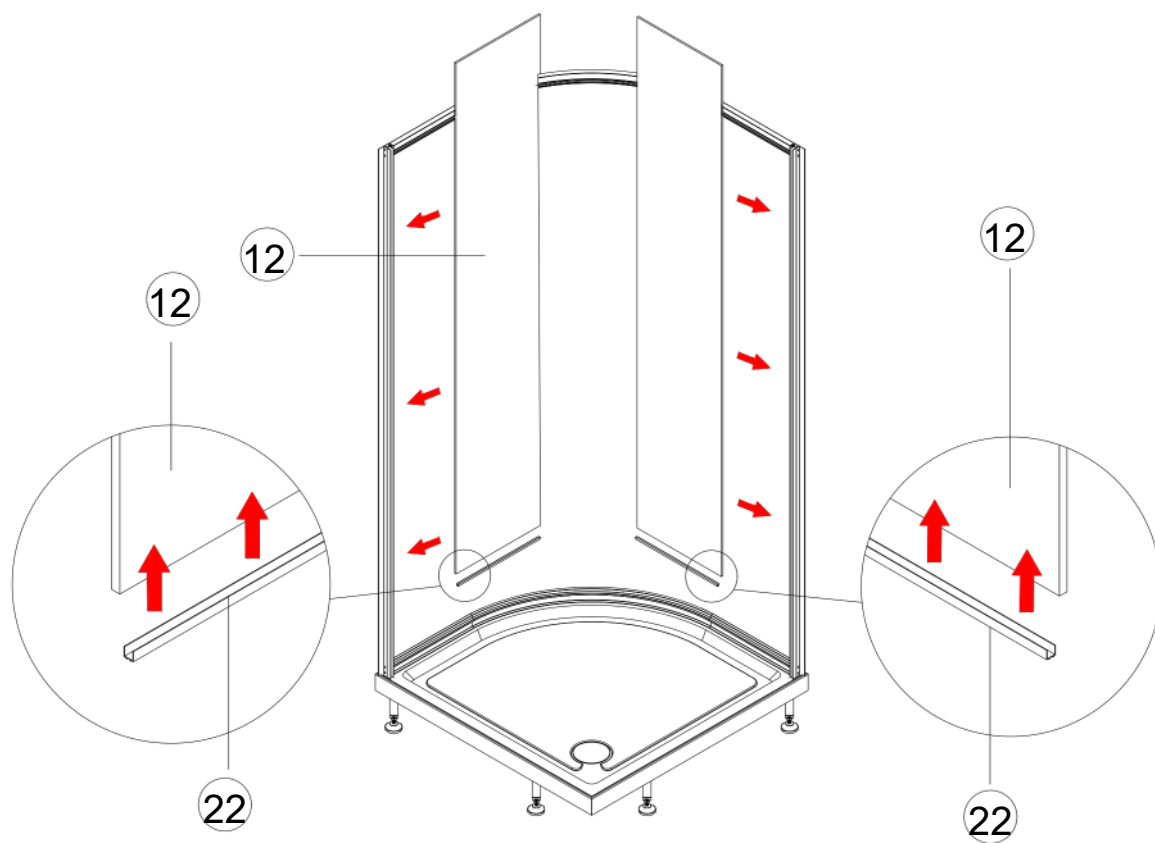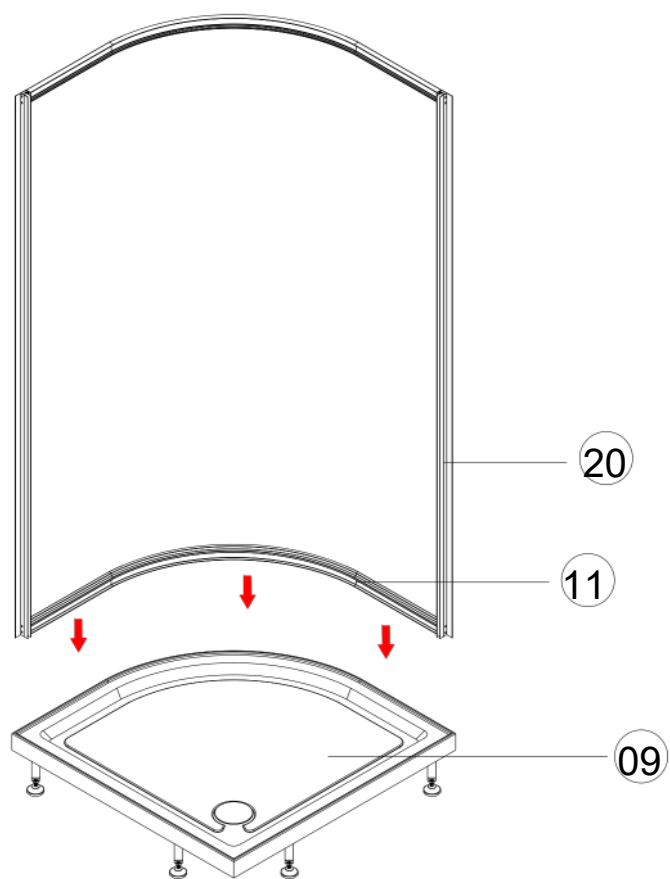

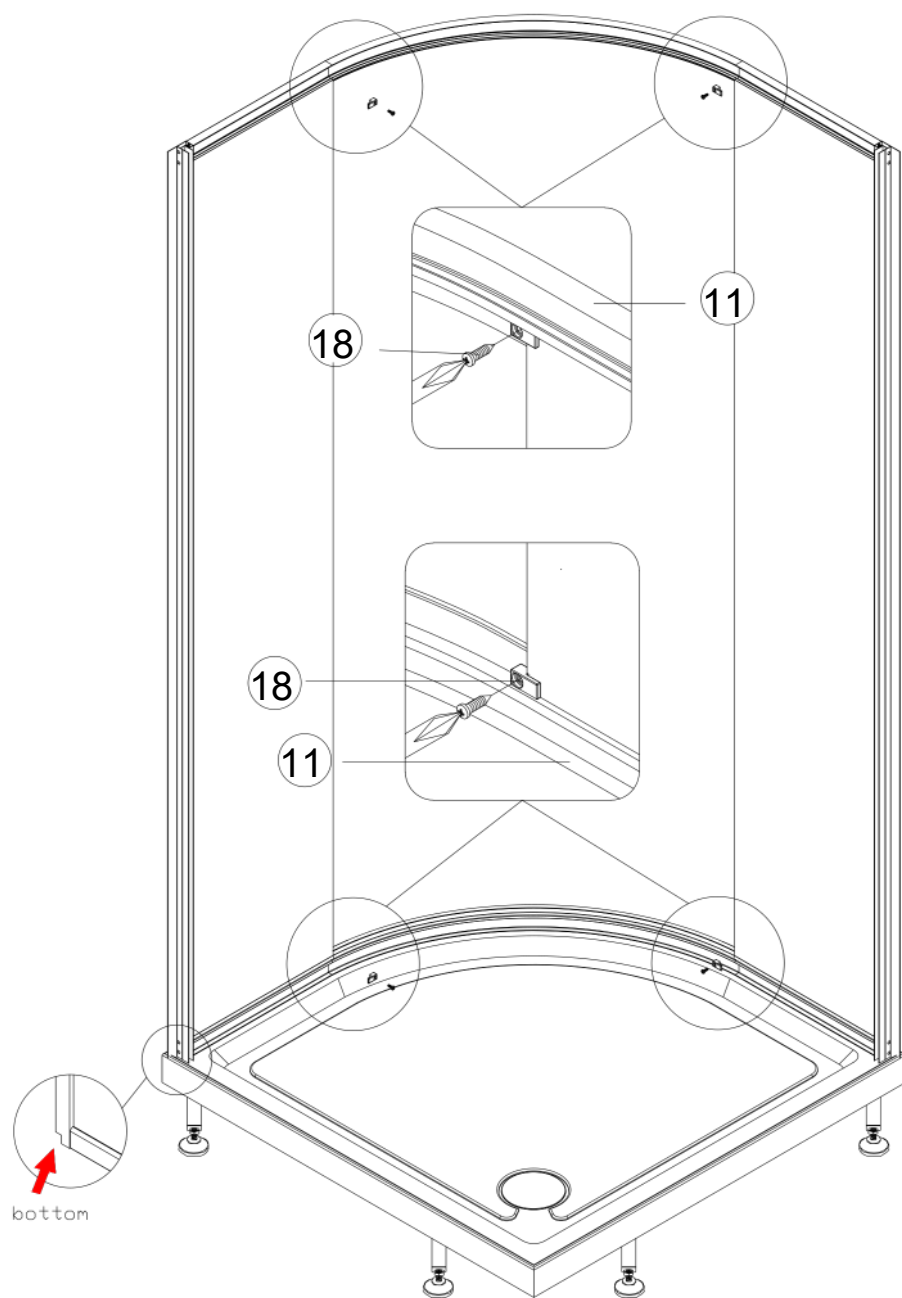

Det er mer praktisk å
installere ved å fukte
det med såpevann.

